

# Energy Management Energy Meter Type **GNM3D, GNM3D-RS485, GNM3D-MBUS** **GNM3D-LP**



- Protection degree (front): IP51
- Digital input (for tariff management)
- Easy connection or wrong current direction detection
- Certified according to MID Directive: see “how to order” below

- Three phase energy meter
- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Accuracy  $\pm 0.5\%$  RDG (current/voltage)
- Direct current measurement up to 65AAC
- Backlit LCD display (3x 8-digit) with integrated touch key-pad
- Energy readout on display: 8 digit
- Variable readout on display: 4 digit
- Energy measurement: kWh and kvarh (imported/exported); kWh+ by 2 tariffs; kWh per phase
- System variables: kW, kvar, kVA, VLL, VLN, PF, Hz, kWdmd, kWdmd peak
- Phase variables: kW, kvar, kVA, VLL, VLN, A, PF
- Self power supply
- Dimensions: 3-DIN module
- Pulse output (GNM3D or GNM3D-LP)
- RS485 Modbus port (GNM3D-RS485)
- M-bus port (GNM3D-MBUS)

## Product description

Three-phase energy meter with backlit LCD display with integrated touch keypad. Particularly indicated for active energy metering and for cost allocation in applications up to 65 A (direct connection), with dual tariff management availability. It can measure imported and exported energy. Housing for DIN-rail mounting, with IP51 front degree protection. The meter can be provided with pulse output proportional to the active energy being measured, RS485 Modbus port or M-bus port. Available for legal metrology (only for imported energy).

**MID** Certified according to MID Directive, Annex “B” + Annex “D” for legal metrology relevant to active electrical energy meters (see Annex MI-003 of MID). Can be used for fiscal (legal) metrology.

## Consumption

**GNM3D:** Pulse output  
**GNM3D-RS485:** RS485 port  
**GNM3D-MBUS:** M-bus port

## Consumption / Production

**GNM3D-LP:** Pulse output

### Range

208 to 400 VLL AC -  
5(65)A  
(Direct connection)

### System

3-phase, 3 or 4 wire;

### Power supply

Self power supply  
-20% +20% of the rated measuring  
input voltage, 45 to 65Hz

## Input specifications

<b>Rated Inputs</b>		<b>Temperature drift</b>	≤200ppm/°C
Current type	3-phase loads, direct connection	<b>Sampling rate</b>	4096 samples/s @ 50Hz 4096 samples/s @ 60Hz
Current range	5(65)A	<b>Display and touch key-pad</b>	
Nominal voltage	208 to 400 VLL AC	Type	Backlit LCD, 3 rows by 8-digit each, h 7 mm
<b>Accuracy</b> (@25°C ±5°C, R.H. ≤60%, 45 to 65 Hz)		Read-out	Energy: 8 digit. Variables: 4 digit
	Imin=0.25A; Ib: 5A, Imax: 65A; Un: 113 to 265VLN (196 to 460VLL)	Touch key	3 (DOWN, Enter and UP).
	Imin=0.25A; Ib: 5A, Imax: 65A; from 208 to 400 VLL AC	<b>Max. and Min. indication</b>	
Current	From 0.04Ib to 0.2Ib: ±(0.5%RDG+1DGT)	Energies	Max. 99 999 999 Min. 0.01
	From 0.2Ib to Imax: ±(0.5%RDG)	Variables	Max. 9999 Min. 0.01
Phase-neutral voltage	In the range Un: ±(0.5% RDG)	<b>Memory</b>	
Phase-phase voltage	In the range Un: ±(1% RDG)	Energy	10 <sup>12</sup> cycles. Energy value is saved every time the less significant digit increases.
Frequency	Range: 45 to 65Hz.	Programming parameters	10 <sup>12</sup> cycles. When a parameter is modified, only the relevant memory cell is overwritten
Active power	From 0.05 In to Imax, within Un range, PF=1: ±(1% RDG)	<b>LEDs</b>	Flashing red light pulses according to EN50470-3, EN62052-11, 1000 imp./ kWh (min. period: 90ms) Fix orange light: wrong current direction (only with LP option)
	From 0.1 In to Imax, within Un range, PF=0.5L or 0.8C: ±(1% RDG)	<b>Current overloads</b>	
Power factor	±[0.001+1%(1.000 - "PF RDG")]	Continuous	65A, @ 50Hz
Reactive power	From 0.05 In to Imax, within Un range, sinphi=1: ±(2% RDG)	For 10ms	8450 A
	From 0.1 In to Imax, within Un range, sinphi=0.5L or 0.8C: ±(2% RDG)	<b>Voltage Overloads</b>	
Energies		Continuous	1.2 Un
Active energy	Class 1 according to EN62053-21 and MID Annex MI-003 Class B (Class B (kWh) according to EN50470-3)	For 500ms	2 Un
		<b>Input impedance</b>	
Reactive energy	Class 2 according to EN62053-23	230VL-N	1.2Mohm
Start-up current:	20mA	120VL-N	1.2Mohm
	Self-consumption is not measured.	5(65) A	< 1.25VA
Start-up voltage	90VLN	<b>Wrong connection detection</b>	Installation guide to indicate if connections are correctly carried out. Can be disabled.
<b>Resolution</b>	Display/serial communication	Phase sequence	Indicates if the phase sequence is not the correct one (L1-L2-L3)
Current	0.1/0.001 A	Correct current direction	Indicates if the current direction is not the right one (only with LP option).
Voltage	0.1/0.1 V	Load conditions	The wrong connection detection works in case of loads with: - PF>0.766 (<40°)
Power	0.01 kW or kVar/ 0.1 W or var		
Frequency	0.1 Hz/0.1Hz		
PF	0.01/ 0.001		
Energies (positive)	0.01 kWh or kvarh / 0.1 kWh or kvarh		
Energies (negative)	0.01 kWh or kvarh / 0.1 kWh or kvarh		
<b>Energy additional errors</b>			
Influence quantities	According to EN62053-21		

## Input specifications (cont.)

power factor if inductive or PF>0.996 (<5°) if capacitive

- a current at least equal to 10% rated current (primary current transformer)

## Digital input specifications

### Digital inputs

Function

Free of voltage contact  
Tariff management (switch between t1-t2)

Overload

In case a voltage is erroneously applied to the digital input, the input is not damaged up to 30 VAC/DC.

Number of inputs

1

Contact measurement voltage

5 V

Input impedance

1kohm

Contact resistance

≤1kohm, close contact  
≥100kohm, open contact

## Output specifications

### RS485 serial port

Function

RS485 by screw connection.  
For communication of measured data, programming parameters  
ModBus RTU (slave function)  
9.6, 19.2, 38.4, 57.6, 115.2 kbaud,  
even or no parity,  
1 to 247 (default: 01)  
1/8 unit load. Maximum 247 devices on the same bus.

Baud rate

0.3, 2.4, 9.6 kbaud  
250

Meters in the M-bus network

Primary address

Selectable

Secondary address

Univocally defined in each unit

Protocol

Identification number range

from 9000 0000 to 9999 9999

Baud rate

Driver input capability

Maximum 250 transceivers on the same bus.

Data format

Unit load

1 unit (1.5mA).

Address

Other

Driver input capability

Available functions: wild card, header, initialisation  
SND\_NKE, and req\_uds management.  
Management of primary address modification via M-bus and reset of partial energy via M-bus available.  
VIF, VIFE, DIF and DIFE: see protocol

Data refresh time

1s

Read command

50 words available in 1 read command

Rx/Tx indication

Rx segment on display is shown when a valid Modbus command is sent to that specific meter  
Tx segment on display is shown when a valid Modbus reply is sent back to the master

### Static output

Purpose

For pulse output proportional to the active energy (kWh)  
Selectable in multiple of 100 (Max 500 or 1500 kWh according to pulse ON duration)

### M-bus port

Function

M-bus by screw connection.  
For communication of measured data

Pulse rate

Protocol

M-bus according to EN13757-3

## Output specifications (cont.)

Pulse ON duration	Selectable: 30ms or 100 ms according to EN62052-31 Open collector PNP	Load	$V_{ON}$ 1 VDC max. 100mA $V_{OFF}$ 80 VDC max.
Output type			

## General specifications

<b>Operating temperature</b>	-20 to +65 °C, indoor, (R.H. from 0 to 90% non-condensing @ 40°C)	<b>Standard compliance</b>	EN62052-11
<b>Storage temperature</b>	-30°C to +80°C (R.H. < 90% noncondensing @ 40°C)	Safety	EN62053-21, EN50470-3
<b>Overvoltage category</b>	Cat. III	Metrology	
<b>Insulation (for 1 minute)</b>	4000 VAC RMS between measuring inputs and digital/serial output (see table) 4000 VAC RMS	<b>Approvals</b>	CE, MID (only MID versions)
<b>Dielectric strength</b>	4000 VAC RMS for 1 minute	<b>Connections</b>	
<b>EMC</b>	According to EN62052-11	Cable cross-section area	Measuring inputs: max. 16 mm <sup>2</sup> , min. 2.5 mm <sup>2</sup> with/without metallic cable ferrule; Max. screw tightening torque: 2.8 Nm
Electrostatic discharges	15kV air discharge;	Other terminals	1.5 mm <sup>2</sup> , Min./Max. screws tightening torque: 0.4 Nm
Immunity to irradiated electromagnetic fields	Test with current: 10V/m from 80 to 2000MHz;	<b>Housing</b>	
Electromagnetic fields	Test without any current: 30V/m from 80 to 2000MHz;	Dimensions (WxHxD)	54 x 90 x 63 mm
Burst	On current and voltage measuring inputs circuit: 4kV	Material	Noryl, self-extinguishing: UL 94 V-0
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz	Sealing covers	Included
Surge	On current and voltage measuring inputs circuit: 4kV;	<b>Mounting</b>	DIN-rail
Radio frequency	According to CISPR 22	<b>Protection degree</b>	
		Front	IP51
		Screw terminals	IP20
		<b>Weight</b>	Approx. 240 g (packing included)

## Power supply specifications

Self power supply

208 to 400VAC VLL, -20%  
+20% 50/60Hz

Power consumption

≤ 1W, ≤ 10VA



## Insulation (for 1 minute) between inputs and outputs

	Measuring input	Digital or serial output	Digital input
Measuring input	-	4 kV	4 kV
Digital or serial output	4 kV	-	0 kV
Digital input	4 kV	0 kV	-

## Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

kvarh, accuracy (RDG) depending on the current

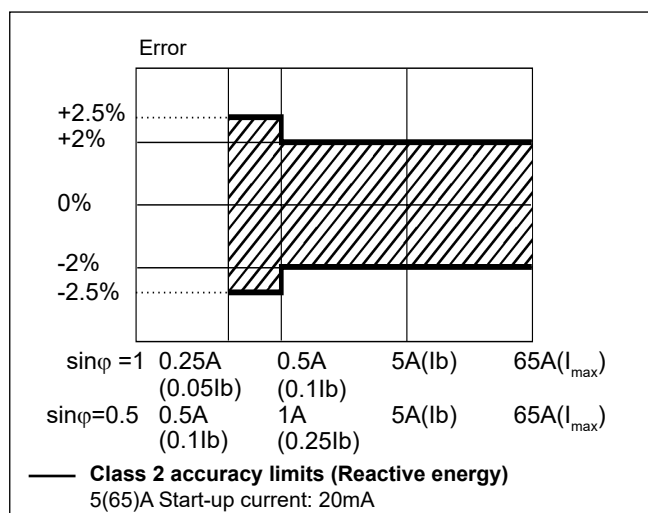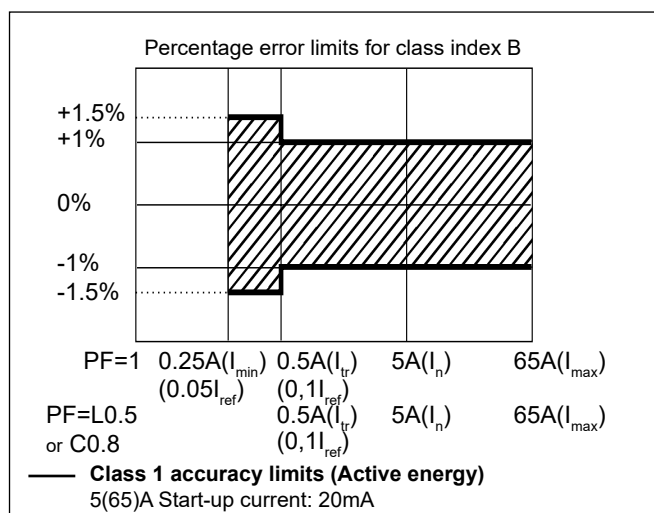

## Display pages








No	1 <sup>st</sup> row	2 <sup>nd</sup> row	3 <sup>rd</sup> row	“Full” mode	“Easy” mode	Note
0	kWh+ (imported)		kW system	X	X	In MID versions this is the only certified energy meter.
1	kWh- (exported)		kW system	X	X	
2	kWh+ (imported)		V L-L system	X	X	
3	kWh+ (imported)		V L-N system	X	X	
4	kWh+ (imported)		PF system	X		
5	kWh+ (imported)		Hz	X		
6	kvarh+ (imported)		kvar system	X	X	
7	kvarh- (exported)		kvar system	X	X	
8	kWh+ (imported)		kVA system	X		
9	kWh+ (imported)	kWdmd peak	kWdmd	X		
10	kWh (t1)	“t1”	kW system	X	X	Only relevant to kWh+, with Tariff menu set to ON.
11	kWh (t2)	“t2”	kW system	X	X	Only relevant to kWh+, with Tariff menu set to ON.
12	kWh L1	kWh L2	kWh L3	X		In the LP MID version Measurement menu set to “B”, this is considering only the imported energy.
13	kVA L1	kVA L2	kVA L3	X		
14	kvar L1	kvar L2	kvar L3	X		
15	PF L1	PF L2	PF L3	X		
16	V L-N L1	V L-N L2	V L-N L3	X		
17	V L-L L1	V L-L L2	V L-L L3	X		
18	A L1	A L2	A L3	X	X	
19	kW L1	kW L2	kW L3	X		

X= available

## Additional available information on the display


Type	Description	Note
Info 1	Year (2017)	Year of production
Info 2	Serial (dddnnnA)	Serial number (ddd= day of the year; nnn=progressive number; A= production line, internal use only)
Info 3	Rev (A.01)	Firmware revision
Info 4	Puls led	Led pulsed/kWh
P3	System	System type
P6	Measure	Measurement type
P7	Install	Wrong connection detection
P8	P int	Integration time for Wdmd calculation
P9	Mode	Set of variables on display
P10	Tariff	Tariff enabling
P11	Home	Selected home page
P12-1	Pulse duration	Pulse ON duration
P12-2	Pulse rate	Pulse rate
P13	Primary address	M-bus primary address
P14	Address	Modbus serial address
P15	Kbaud	M-bus or Modbus baud rate
P16	Parity	Modbus parity
Info 5	Secondary address	M-bus secondary address

## Wiring diagrams

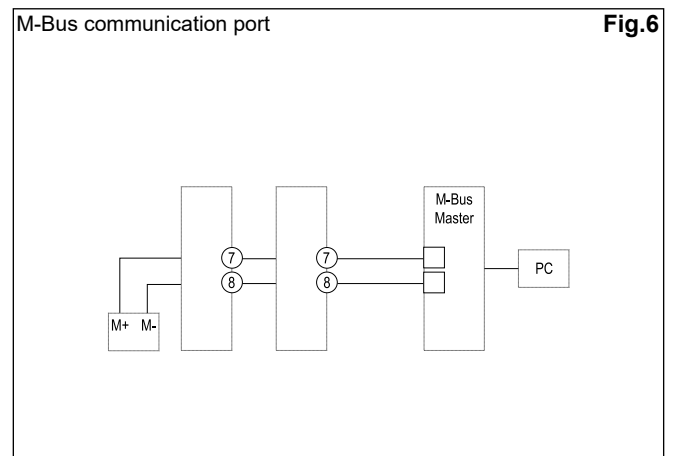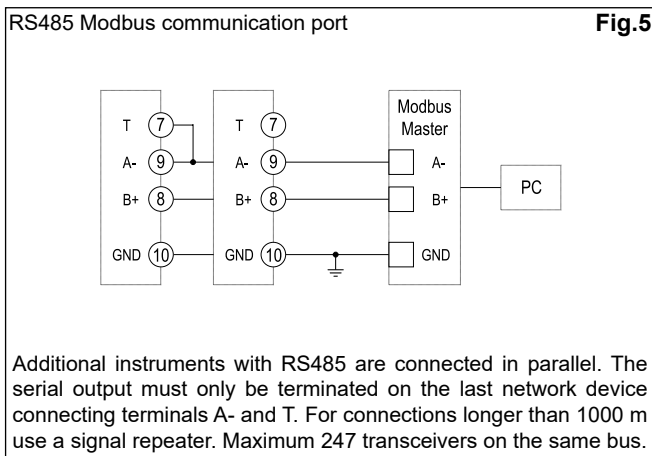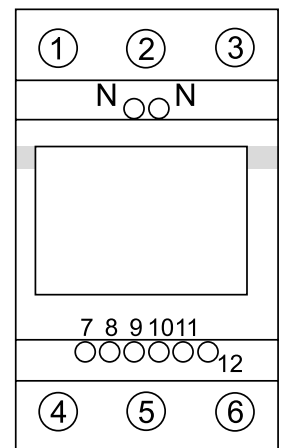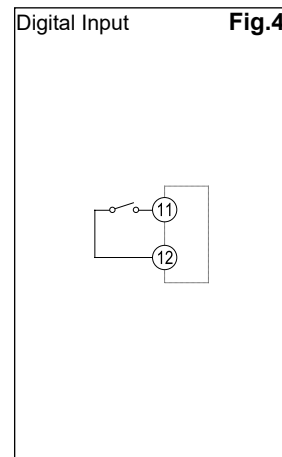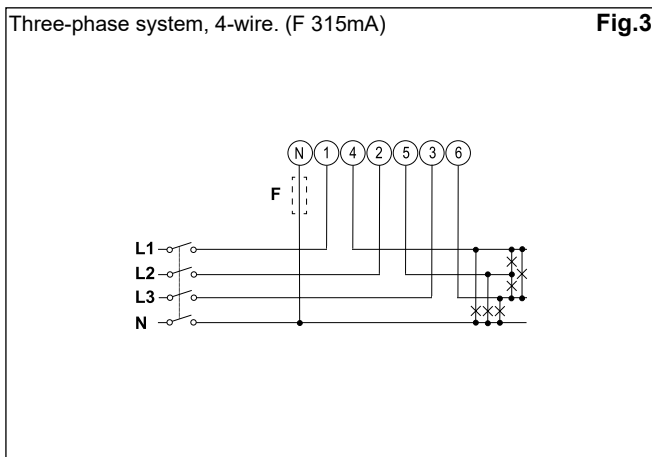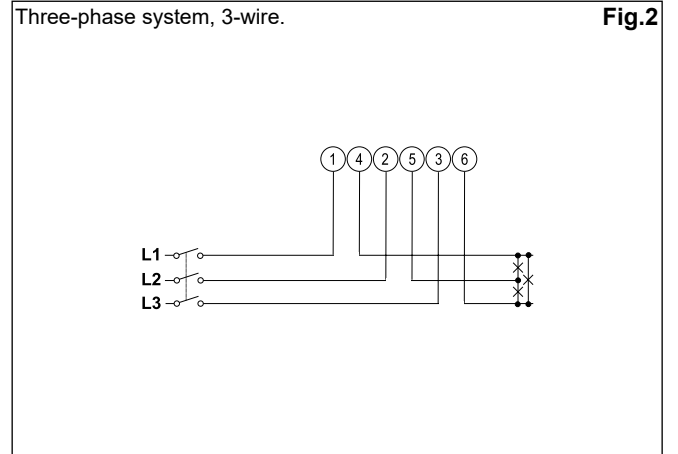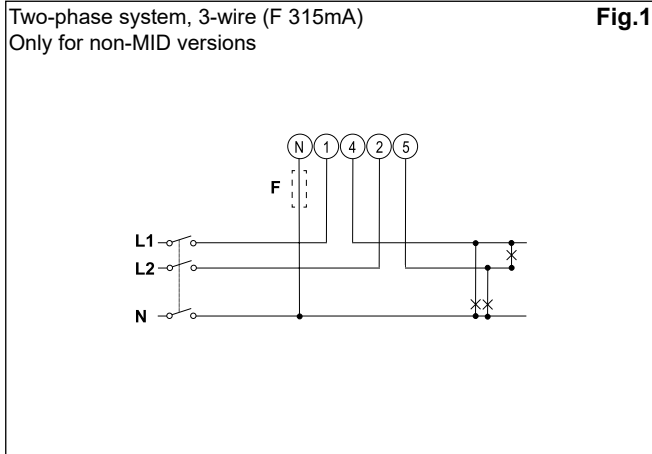



## Front panel description

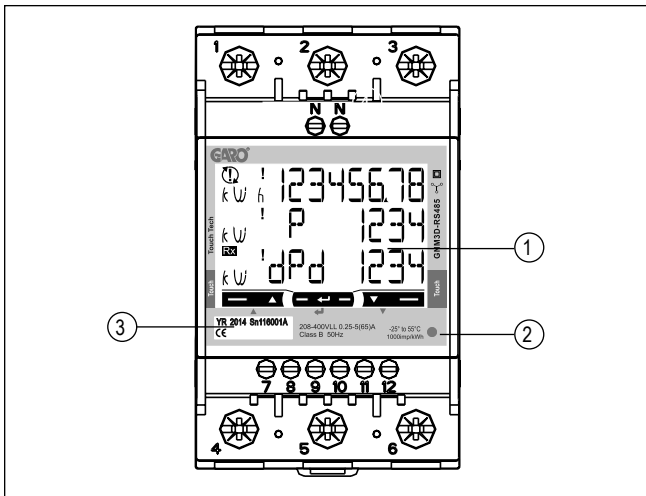

1. **Display**  
Backlit LCD display with touch key-pad.
2. **LED**  
LED proportional to kWh reading
3. **Serial number**  
Area reserved to serial number and MID-relevant data in MID versions

## Dimensions

