

We appreciate your purchase of our Trailers. Please follow these few simple instructions. Instructions should be kept in a safe place and reviewed at least annually.

We offers a one year limited warranty to be free from defects in materials and workmanship for the service life of the product, not to exceed twelve consecutive months from the date of purchase.

The Jack, fence, tool box and linear are optional items. If you do not purchase the corresponding product, please ignore their installation steps.


ASSEMBLY INSTRUCTIONS

Tools needed – An adjustable wrench

IMPORTANT ASSEMBLY TIP: Do not tighten any nut and bolt combinations completely until all parts are assembled together! Finger tighten plus one turn of a wrench only! This will temporarily hold the lock nut on the bolt while helping alignment of all parts! After all parts are assembled together, all nut & bolt combinations must be completely tightened.

1. Install the rear prop, using 2-M10*70 bolt, 2-M10 nut, 2- ϕ 10 washer, 2- ϕ 10 spring washer.
2. Install the frame and rear wheel bracket together, using 2-M10*70 bolt, 2-M10 nut, 2- ϕ 10 washer, 2- ϕ 10 spring washer.
3. Install the front prop, using 2-M10*40 nut, 2-M10 bolt.
4. Install the V plastic part, using M10 nut, M10*90 bolt.
5. Install the draw bar and winch base, using 2-M10*120 bolt, 2- ϕ 10 spring washer, 2- ϕ 10 washer, 2-M10 nut.
6. Install the mudguard, using 8-M8 nut, 8-M8*20 bolt.
7. Install the tire, using 8-M12 nut.
8. Install the winch, using 2-M8 nut, 2-M8*20 bolt.
9. Install the draw bar and frame together, using 2-M10*90 bolt, 2-M10 nut, 2- ϕ 10 washer, 2- ϕ 10 spring washer.
10. Install the drivepipe on the rear prop, using 2-M10*40 bolt, 2-M10 nut.

ASSEMBLY DRAWING

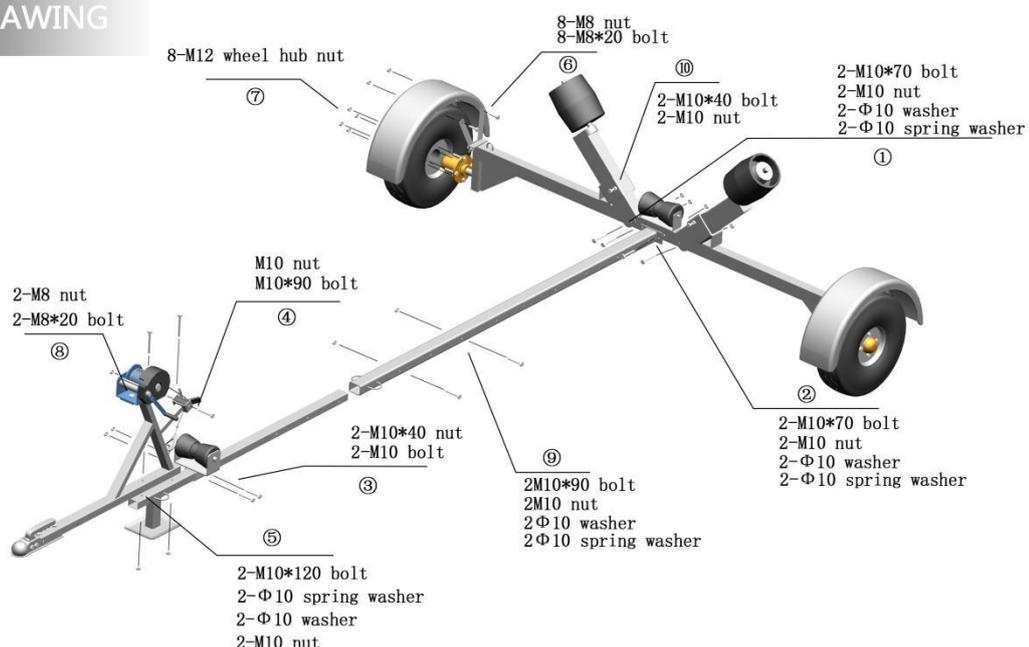

Attention:

For the linear actuator

 This item is designed for certain application only. The distributor cannot be responsible for issues arising from modification. We strongly recommend this item not be modified and /or use for any application other than that for which it was designed.

General safety rules

 **WARNING:** Read and understand all instruction. Failure to follow all instructions listed below may result in serious injury.

 **WARNING:** The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions or situations that could occur. It must be understood by the operator that common sense and caution are factors which can't be built into this product, but must be supplied by the operator.

WARNING

READ, UNDERSTAND AND FOLLOW ALL ASSEMBLY, INSPECTION, MAINTENANCE & USE INSTRUCTIONS PROVIDED BEFORE EACH USE. FAILURE TO FOLLOW ALL WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

DOUBLE CHECK THE ASSEMBLY OF YOUR TRAILER TO BE SURE YOU ASSEMBLED IT CORRECTLY AND ALL NUT & BOLT ASSEMBLIES ARE TIGHT BEFORE INITIAL USE.

BE SURE TO PERIODICALLY CHECK ALL NUT AND BOLTS FOR TIGHTNESS. OVER TIME, NUTS AND BOLTS MAY BECOME LOOSE FROM VIBRATION.

BE SURE TO ALWAYS HAVE THE CORRECT AMOUNT OF AIR PRESSURE IN TIRES. THIS WILL HELP DETER FROM UNNECESSARY WEAR AND/OR DAMAGE. AIR PRESSURE CAN BE FOUND ON SIDEWALL OF TIRE. NEVER DRIVE ON HILLY TERRAIN - EXCESSIVE WEIGHT CAN CAUSE WEIGHT SHIFTS WHICH CAN LEAD TO LOSS OF CONTROL OF YOUR ATV AND/OR ATV TRAILER.

DO NOT DRIVE IN EXCESS OF 10 MPH WHILE USING THIS PRODUCT.

NEVER ALLOW PEOPLE OR ANIMALS TO RIDE IN THE ATV TRAILER! IT IS NOT DESIGNED FOR THAT MATTER.

USE CAUTION NEAR TRAILER TILT LATCH. BE SURE LATCH IS ENGAGED BEFORE EACH USE.

Never...

- Use excessive speeds while towing trailer.
- Exceed the maximum load capacity of 500KGS.
- Allow people or animals to ride in trailer.
- Use on hilly terrain.
- Use a damaged product.
- Use when intoxicated or using over-the-counter medication or prescription drugs.
- Use on rocky or obstacle ridden terrain.
- Use carelessly -- Think Safety!

TFB-Trailer-2 boat trailer Part List

NO.	DESCRIPTION	QTY
1	M10*70 bolt	4
2	M10 nut	11
3	∅10 washer	8
4	∅10 spring washer	8
5	M10*40 nut	2
6	M10 bolt	2

NO.	DESCRIPTION	QTY
7	M10*90 bolt	3
8	M10*120 bolt	2
9	M8 nut	10
10	M8*20 bolt	10
11	M10*40 bolt	2
12	M12 nut	8