
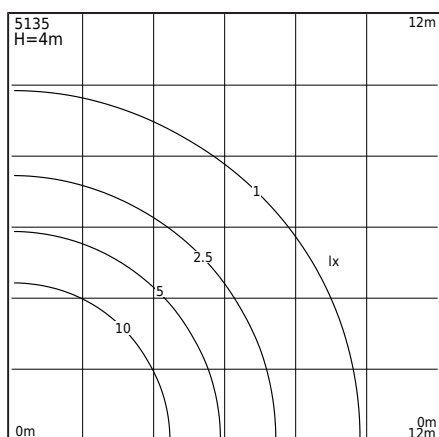
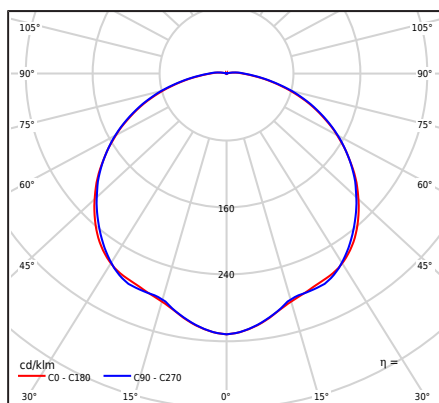


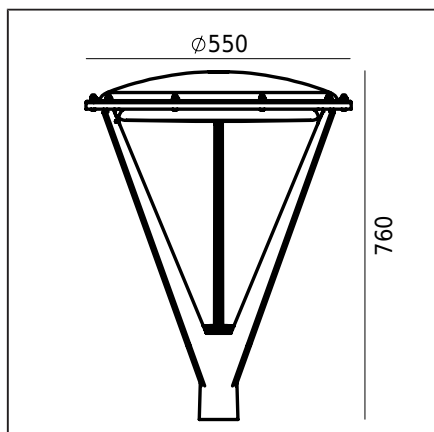

## Allmän information

|                                   |                                                          |
|-----------------------------------|----------------------------------------------------------|
| Typ armatur                       | Stolpe                                                   |
| Material                          | Pulverlackerad aluminium                                 |
| Diffuser/Avskärmning:             | PMMA, opal                                               |
| Typ ljuskälla                     | LED modul + driver                                       |
| Ljusstyrning                      | Ej dimbar                                                |
| Netto / Bruttovikt armatur        | 9,18kg / 11,75kg                                         |
| Förpackning mått [cm]             | 80x62x62                                                 |
| LED                               | Cree JK3030 DK190707VA02 (Produktblad)                   |
| Drivdon                           | Philips Xi BP 40W 0.3-1.0A S 230V C123_sXt (Produktblad) |
| Drivdon hållbarhet                | 100000h                                                  |
| Led modul effekt                  | 28,9W                                                    |
| Armatur effekt                    | 32,3W                                                    |
| Lumen modul                       | 4503lm                                                   |
| Lumen ut                          | 3320lm                                                   |
| Led modul effekt                  | 155,8lm/W                                                |
| Armaturens effekt                 | 102,8lm/W                                                |
| ULOR                              | 2%                                                       |
| Färgtemperatur                    | 4000K                                                    |
| Färgbeständighet (McAdam ellipse) | SDCM3                                                    |
| Färgtolkningsindex (CRI/Ra)       | 80                                                       |
| Nominell livstid L70/B50 vid 25°C | >72 000h                                                 |
| LED-fotobiologiskt hot            | RG0 or RG1                                               |
| Energieffektivitetsindex (EEL)    | A++                                                      |
| Effektfaktor                      | PF>0,98                                                  |
| THD-faktor                        | 9%                                                       |
| Spänning                          | 6 / 10kV                                                 |
| Ta nominel:                       | +25°C                                                    |
| Maximal omgivningstemperatur      | -30...+25°C                                              |
| Inrush current                    | 19A / 210μs                                              |

## Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer, BIM Revit, BIM ArchiCAD