


Art	E-nr	Färg	RAL
6120AL	7749587	ALUMINIUM	9006
6120GR	7749588	GRAFIT	7016

## Allmän information

Typ armatur	Pollare
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	Glas - PMMA, frostat
Typ ljuskälla	LED modul + driver
Ljusstyrning	Dimbar (Triac)
LED	Cree DK201002 V1 JK3030 6V 3K (☞ Produktblad)
Drivdon	TCI Mini MD 18W 350mA code 127030 Triac (☞ Produktblad)
Led modul effekt	13,7W
Armatur effekt	16,1W
Lumen modul	2093lm
Lumen ut	1358lm
Led modul effekt	152,8lm/W
Armaturens effekt	84,3lm/W
ULOR	0%
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	>72 000h
Energieffektivitetsindex (EEI)	/ ☞ EPREL
Effektfaktor	PF 0,95
THD-faktor	10%
Ta nominel:	+25°C
Inrush current	2A / 50µs

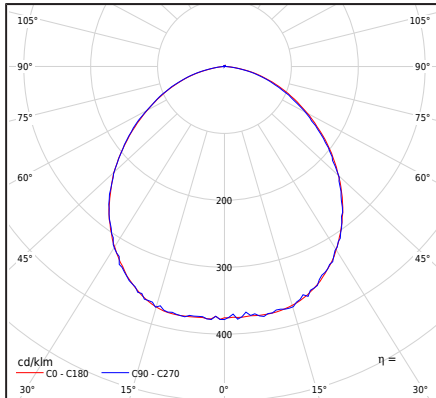

## Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer

