


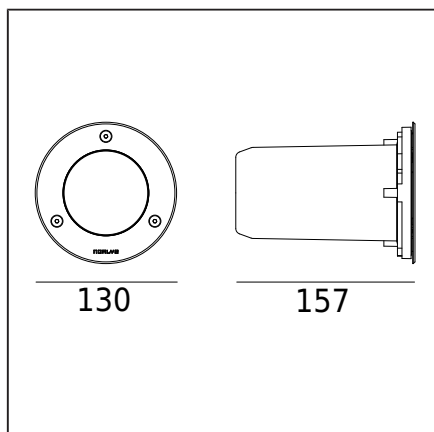

Art	E-nr	Färg	RAL
1760ST	7767543	ROSTFRITT STÅL	-

Allmän information

Typ armatur	Markarmatur
Material	Pulverlackerad aluminium Front - Rostfritt stål
Diffuser/Avskärmning:	Glas - härdad, klart
Typ ljuskälla	LED modul AC
Ljusstyrning	Dimbar (Triac)
Netto / Bruttovikt armatur	1,02kg / 1,22kg
Förpackning mått [cm]	16,5x16,5x21,5
LED	Lumens EDC 38C 4W xxx 230V A101 3K (☞ Produktblad)
Led modul effekt	4W
Armatur effekt	4W
Lumen modul	460lm
Lumen ut	318lm
Led modul effekt	115lm/W
Armaturens effekt	79,5lm/W
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	50 000h
Energieffektivitetsindex (EEI)	A / ☞ EPREL
Effektfaktor	PF 0,99
THD-faktor	20%
Ta nominel:	+25°C
Inrush current	17mA / 60ms

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer, BIM ArchiCAD

